


Trasportatori Pollina TP10

Manure Belt Conveyors TP10



Cross Section

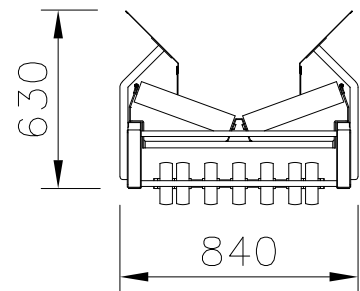

Technical Data

- Maximum Length till 90m
- STANDARD Idler unit 680mm
- STANDARD Drive unit 540mm
- Up to 50m of Length SPECIAL Idler unit 1210mm
- If the 7,5kW motor is needed, the Drive Unit will be 740mm and the Idler roller must be Ø220mm
- Motorized by Water-Proof Drum motor. dia.220mm
- Rubber Belt, also for temperature till - 40°
- Capacity: 1T x hour
- Speed: 75m/min




**Water-Proof
Drum motor.
dia.220mm**



**Running
Rollers system**

Height at transfer point between 2 conveyors

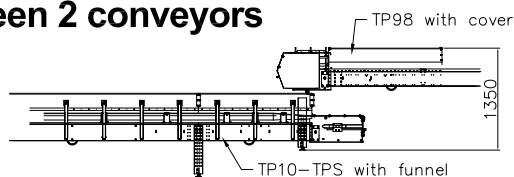


MANURE BELT CONVEYOR WEIGHT:

		CONVEYOR:
Kg.	40	: UNIFORMLY WEIGHT DISTRIBUTED x meter
		DRIVE UNIT:
Kg.	130	: CONCENTRATED LOAD
		IDLER UNIT:
Kg.	60	: CONCENTRATED LOAD
Kg.	30	: APPROXIMATE MANURE WEIGHT x meter

Trasportatore con snodo TPS


Conveyors with Hinge Unit TPS

Manure Removal standard layout

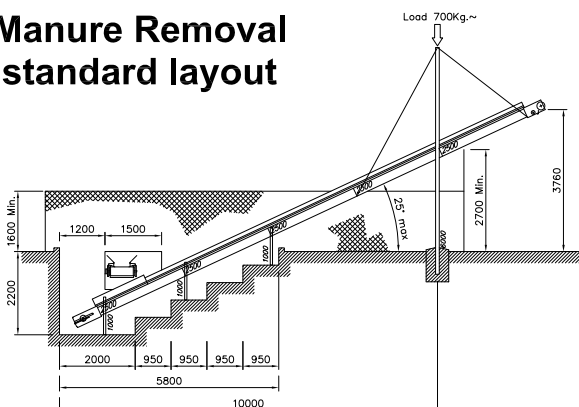

Technical Data

- Maximum Length: Horizontal part 50m - Sloped part 15m

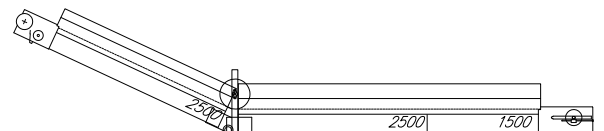

TPS - Hinge Unit



TPS